


Correspondence Between Controllers and Parameters

JUPITER-8

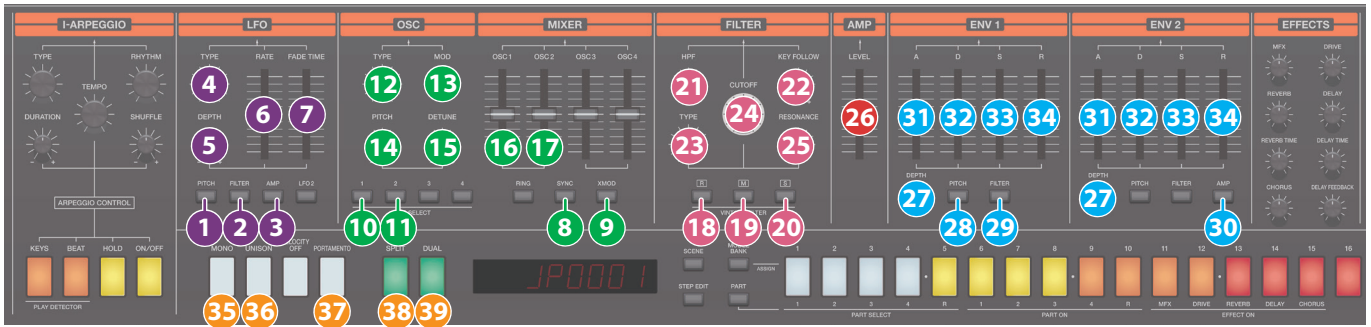

Section	Controller	Parameter	Destination or operation when used with the [SHIFT] button	
LFO	1	Pitch	Select PITCH LFO	
	2	FILTER	Select FILTER-LFO	
	3	AMP	Select AMP-LFO	
	4	TYPE	LFO WAVEFORM	JP8: LFO WAVEFORM
	5	DEPTH	If "PITCH-LFO" is selected LFO MOD If "FILTER-LFO" is selected FILTER MOD If "AMP-LFO" is selected AMP MOD-STEP	JP8: LFO MOD JP8: FILTER MOD JP8: AMP MOD-STEP
	6	RATE	LFO RATE	JP8: LFO RATE
	7	FADE TIME	LFO DELAY TIME	JP8: LFO DELAY TIME
OSC	8	SYNC	Select SYNC MOD MODE	JP8: SYNC SWITCH
	9	XMOD	Select XMOD MOD MODE	JP8: SYNC SWITCH
	10	OSC1 SEL	Select OSC1	
	11	OSC2 SEL	Select OSC2	
	12	TYPE	If "OSC1" is selected OSC1 WAVEFORM If "OSC2" is selected OSC2 WAVEFORM	JP8: OSC1 WAVEFORM JP8: OSC2 WAVEFORM
	13	MOD	CROSS MOD	JP8: CROSS MOD
	14	Pitch	If "OSC1" is selected OSC1 RANGE If "OSC2" is selected OSC2 RANGE	The "TONE EDIT > OSC2 MODE" parameter is "NORMAL." JP8: OSC2 RANGE The "TONE EDIT > OSC2 MODE" parameter is "LOW FREQ." JP8: LOW FREQ
	15	DETUNE	OSC2 FINE TUNE	JP8: OSC2 FINE TUNE
	16	OSC1 LEVEL	OSC1 LEVEL	JP8: OSC1 LEVEL
	17	OSC2 LEVEL	OSC2 LEVEL	JP8: OSC2 LEVEL

Section	Controller	Parameter	Destination or operation when used with the [SHIFT] button	
FILTER	18	[R]	Change FILTER TYPE	JP8: VINTAGE FLT TYPE
	19	[M]	Change FILTER TYPE	JP8: VINTAGE FLT TYPE
	20	[S]	Change FILTER TYPE	JP8: VINTAGE FLT TYPE
	21	HPF	HPF	JP8: HPF
	22	KEY FOLLOW	FLT KEY FOLLOW	JP8: FLT KEY FOLLOW
	23	TYPE	FILTER SLOPE	JP8: FILTER SLOPE
	24	CUTOFF	CUTOFF	JP8: CUTOFF
AMP	25	RESONANCE	RESONANCE	JP8: RESONANCE
	26	LEVEL	AMP LEVEL	JP8: AMP LEVEL
ENV1/2	27	DEPTH	If "PITCH ENV" is selected PIT ENV DEPTH If "FILTER ENV" is selected FLT ENV DEPTH If "AMP ENV" is selected Not operable	JP8: PIT ENV DEPTH JP8: FLT ENV DEPTH
	28	Pitch	Select PITCH ENV	-
	29	FILTER	Select FILTER ENV	-
	30	AMP	Select AMP ENV (always)	-
	31	A	ENV1/2 ATTACK	JP8: ENV1/2 ATTACK
	32	D	ENV1/2 DECAY	JP8: ENV1/2 DECAY
	33	S	ENV1/2 SUSTAIN	JP8: ENV1/2 SUSTAIN
EDIT	34	R	ENV1/2 RELEASE	JP8: ENV1/2 RELEASE
	35	MONO	MONO	JP8: KEY MODE
	36	UNISON	UNISON	JP8: KEY MODE
	37	PORTAMENTO	PORTAMENTO	JP8: PORTA TIME
	38	SPLIT	SPLIT	-
	39	DUAL	DUAL	L/R DUAL

* For other parameters, refer to "Parameter Guide" (PDF).

* JP8 parameters are in TONE EDIT.